


MOTORCYCLE INSPECTION AND MAINTENANCE

- 1. Tire pressures and condition
- 2. Headlight
- 3. Tail light
- 4. Stop lamp
- 5. Engine oil
- 6. Turn signal lamps
- 7. Horn
- 8. Front brake lever
- 9. Rear brake pedal
- 10. Chain/belt

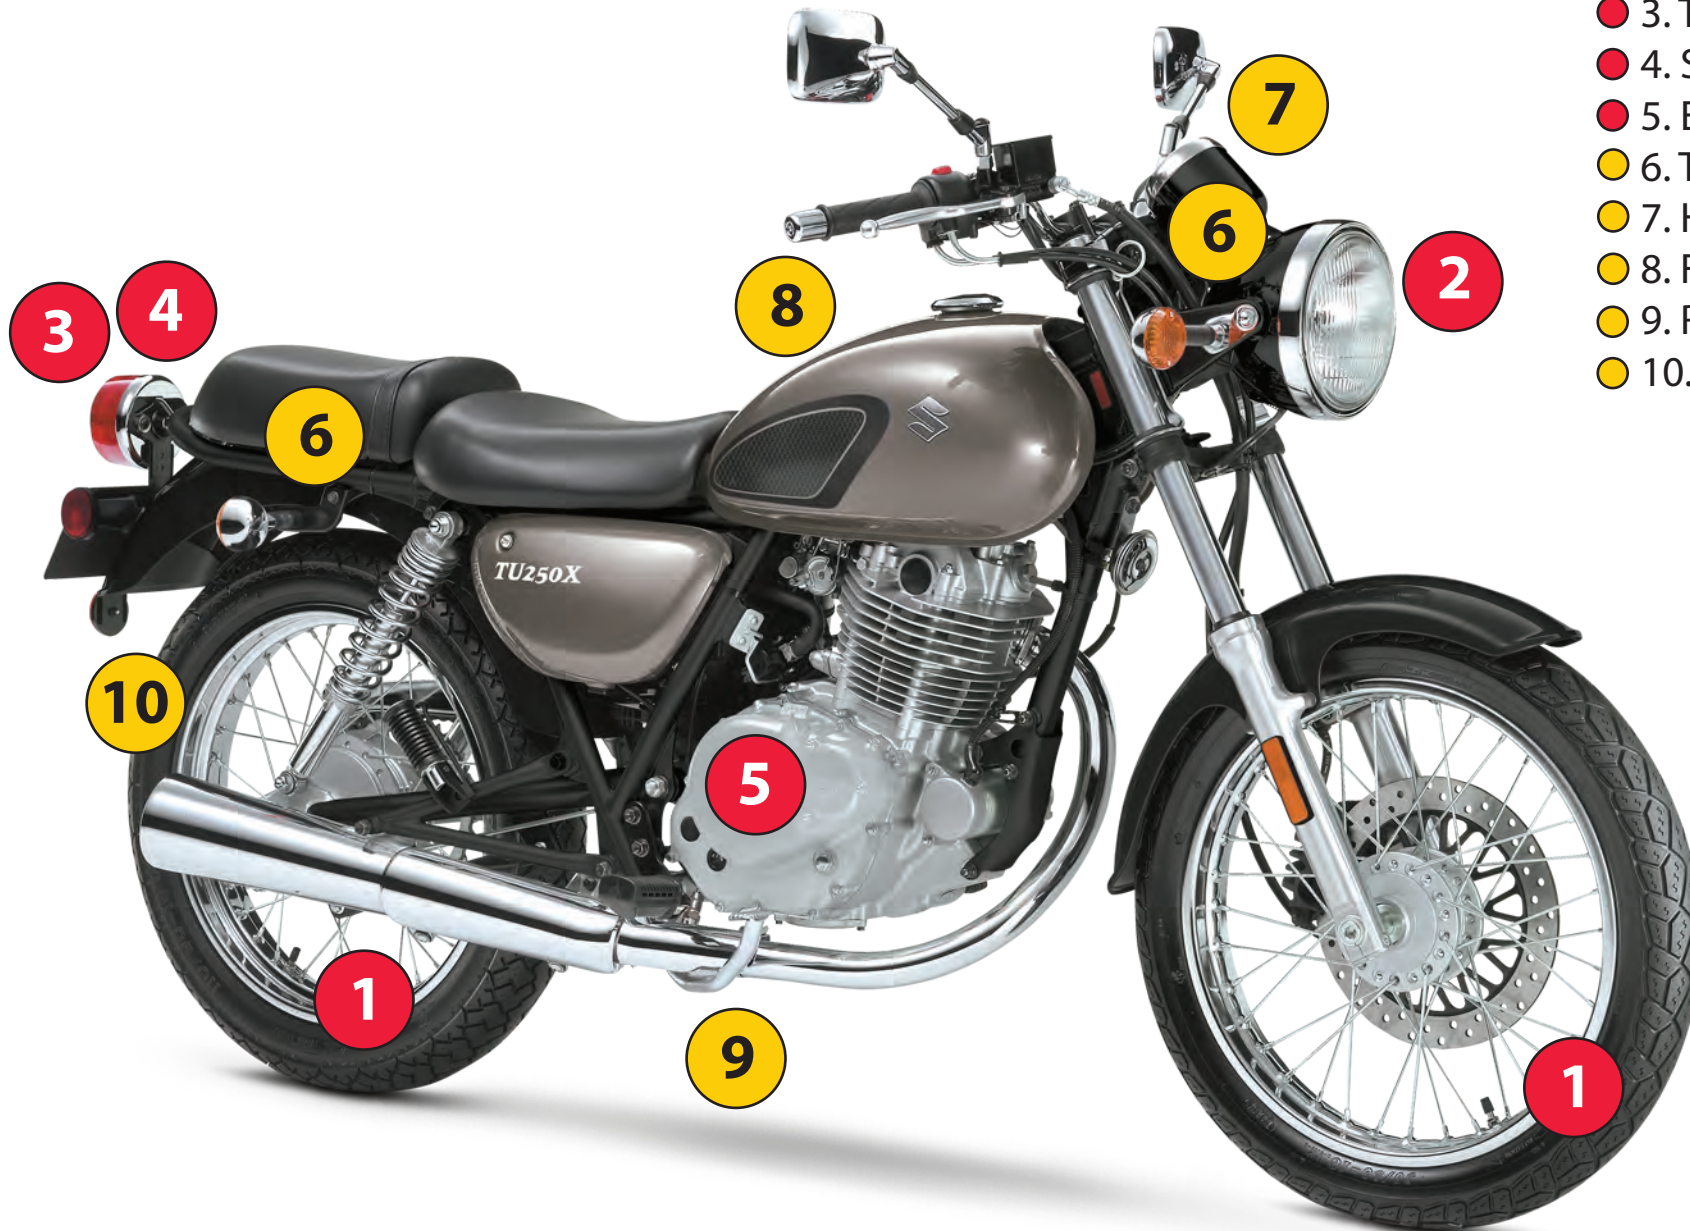

MOTORCYCLE INSPECTION AND MAINTENANCE CHECKLIST

Refer to your owners manual for detail.

TIRES/WHEELS

1. ● Tires. Check tire condition (bluing, cracks, punctures, damage and wear) and age
2. ● Tire pressures.
3. ● Wheels. Wheel rims and spokes undamaged
4. ● Brakes pads/shoes. Lining sufficient thickness (owner's manual)

ELECTRICAL

5. ● Headlight. Always on; check high and low beam
6. ● Tail light. Always on
7. ● Stop lamp. Lights up when front or rear brake applied
8. ● Turn signal lamps. Each side; both front and rear signals flash when activated
9. ● Turn signal marker lamps. (Varies) Both sides; both front and rear lamps always on
10. ● Horn. Sounds loudly when activated
11. ● Battery terminals. Fastened tightly and uncorroded

CONTROLS

12. ● Throttle grip. Operates smoothly without sticking; free play; handlebars can turn full-lock without affecting rpm
13. ● Front brake lever. Positioned for best comfort; operates smoothly without sticking; free play; activates stop lamp
14. ● Rear brake pedal. Positioned for best comfort; operates smoothly without sticking; free play; activates stop lamp; (varies) adjusted correctly; not loose or bent
15. ● Clutch lever. Positioned for best comfort; operates smoothly; free play
16. ● Shift lever. Positioned for best comfort; not loose or bent
17. ● Handlebars. Positioned best comfort; not loose or bent
18. ● Footrests. (Varies) Positioned for best comfort; not loose or bent
19. ● Mirrors. Positioned for best view; tightened securely

SUSPENSION

20. ● Fork settings. (Varies) spring preload, compression damping and rebound damping
21. ● Shock(s) settings. Spring preload, (varies) compression damping and rebound damping
22. ● Final drive adjustment. Chain or belt tension/free play, wear or damage
23. ● Fasteners. All visible fasteners torqued to factory specifications (torque wrench and shop manual required)

FLUIDS

24. ● Engine oil. Full; fresh
25. ● Engine coolant. (Varies) full; fresh
26. ● Battery fluid. (Varies) full
27. ● Front brake fluid. (Varies) full; fresh
28. ● Rear brake fluid. (Varies) full; fresh
29. ● Clutch fluid. (Varies) full; fresh
30. ● Fork oil. Full; fresh
31. ● Gear oil. (Varies) full; fresh

LUBRICATION

32. ● Chain clean and lubricated.
33. ● Throttle cable/linkage lubricated.
34. ● Front brake cable/linkage lubricated. (Varies)
35. ● Rear brake linkage lubricated.
36. ● Clutch cable/linkage lubricated. (Varies)
37. ● Side stand and center stand pivots lubricated. (Varies)

LEAKS

38. ● Fork seals. No moisture or drips
39. ● Brake calipers. No moisture or drips
40. ● Brake hoses. No moisture, drips, cracks
41. ● Engine case. No moisture or drips
42. ● Oil lines. No moisture or drips
43. ● Coolant hoses. No moisture, drips, cracks
44. ● Shaft final drive. No moisture or drips
45. ● Shock(s). No moisture or drips
46. ● Chain lubricant. No excess/spray

Download and print this checklist free at <http://team-oregon.org/resources>.
Copyright ©2012 TEAM OREGON Motorcycle Safety Program.

